

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

12

**EUROPEAN PATENT APPLICATION**

21 Application number: 83302016.7

61 Int. Cl.<sup>3</sup>: **A 61 K 7/11**  
**C 08 L 83/06, C 08 L 83/08**

22 Date of filing: 11.04.83

30 Priority: 20.05.82 US 380178

43 Date of publication of application:  
30.11.83 Bulletin 83/48

84 Designated Contracting States:  
DE FR GB

71 Applicant: DOW CORNING CORPORATION  
P.O. Box 1767  
Midland Michigan 48640(US)

72 Inventor: Starch, Michael Stephen  
3945 E. Patrick  
Midland Michigan(US)

74 Representative: Laredo, Jack Joseph et al,  
Elkington and Fife High Holborn House 52/54 High  
Holborn  
London, WC1V 6SH(GB)

54 Compositions used to condition hair.

57 A composition consisting essentially of a siloxane having substituents that provide attachment to the hair, surfactants, additives that provide freeze-thaw stability, and water is disclosed. The composition may also contain thickeners, and additives that reduce static electricity build-up, and fly-away. A method of conditioning hair which comprises applying to the hair the composition as defined above is also disclosed.

**EP 0 095 238 A2**

COMPOSITIONS USED TO CONDITION HAIR

This invention relates to a composition that consists essentially of a siloxane having substituents that provide attachment to the hair, surfactants, freeze-thaw stability additives, and water. The  
5 composition may also contain thickeners and additives that reduce static electricity build-up, and fly-away. This invention further relates to a method of conditioning hair which comprises applying to the hair the above-defined composition.

10 It is well known that hair is easily damaged mechanically by combing, brushing, and washing. It is also known that hair is easily damaged physically and chemically by the sun, hair dryers, and permanents or other chemical treatments.

15 In most detergent compositions now in use, the removal of natural oils is unavoidable as a part of the cleansing action, and some hair is damaged as a result of the action of the detergent. Furthermore, shampoo compositions which thoroughly clean the hair usually leave  
20 it difficult to comb so that combing the hair produces an undesirable buildup of static electrical charges. In either case, the hair is very difficult to manage.

To overcome these problems, various alternative and complementary shampoo and hair conditioning systems  
25 have been explored. For example, many conventional shampoo compositions contain animal oils such as lanolin and beef tallow, glycols, fatty esters, or proteins in an effort to condition the hair by replacing stripped oils so as to leave the hair more manageable and natural after  
30 shampooing. However, when these derivatives are

incorporated directly into a shampoo, they may cause a loss of sudsing and sheen, and leave the hair with a sticky and unnatural feel. Vegetable oils such as camellia oil and olive oil, mineral oils such as vaseline  
5 and paraffin, and synthetic oils have also been used either directly, as emulsions, or dissolved in solvents.

It is well known in the art that organopoly-siloxanes give hair glossiness, suppleness, smoothness and softness. United States Patent Number 4,243,657 discloses  
10 a hair dressing composed of dimethylpolysiloxane and diol derivatives or a branched aliphatic alcohol. The use of dimethylpolysiloxanes, however, allows dust to easily adhere to the hair due to the oil build-up caused by the quantity of siloxane required. Hair conditioners composed  
15 of a polyorganosiloxane-polyoxyalkylene block copolymer and ethanol, such as those disclosed in Japanese Patent Sho 56[1980]-136214, have the problem that they are easily removed when exposed to water. Great Britain Patent Number 2,058,103 discloses hair grooming agents  
20 composed of (alkylamino) methylpolysiloxane and a cationic surfactant with an aqueous carrier. Though the siloxane is durable, it is not effective in dissipating static charges generated by combing. Moreover, the level of durability achieved by this agent is not always desirable.  
25 Furthermore, its hydroxyl endblocking is believed to be the cause of some stability problems. Cationic modified organopolysiloxanes containing quaternary nitrogen are disclosed in Japanese Patent Sho 55[1980]-66506. These conditioners, however, are lacking in providing the hair  
30 suppleness, smoothness, and softness.


It is thus an object of this invention to provide a composition that is stable, somewhat durable, and imparts improved gloss, ease of combing, reduced

fly-away, suppleness, smoothness, and softness to the hair. It is a further object of this invention to provide a method of conditioning hair, particularly hair that has been damaged by excessive shampooing or chemical treatments.

This invention relates to a composition that consists essentially of a siloxane having substituents that provide attachment to the hair, surfactants, freeze-thaw stability additives, and water. This composition may also contain thickeners and additives that reduce static electricity build-up and fly-away. This invention further relates to a method of conditioning hair which comprises applying to the hair the above defined composition.

Specifically, this invention relates to a composition consisting essentially of

(A) a siloxane having the general formula



wherein R is a functional group that provides attachment to the hair;

X is selected from the group consisting of hydrogen, phenyl, hydroxyl, and saturated hydrogen radicals composed of 1 to 8 carbon atoms;

a has a value of 0 to 3;

b has a value of 0 to 1; and

$n+m$  has a value of 1 to 2000 with n having a value of 0 to 1999 and m having a value of 1 to 2000;

(B) a surfactant;

(C) an additive that provides freeze-thaw stability; and

(D) water.

The functional group on the siloxane, R, can be any group that provides attachment to the hair. It is preferred, however, that R be a monovalent radical having the general formula  $C_yH_{2y}Z$  wherein  $y$  has a value of 2 to 8 and Z is selected from the group consisting of

5  $-NR'CH_2CH_2NR'_2$ ,  $-COOH$ ,  $-SCH_2COOH$ ,  $-C(=O)NR'_2$ ,  $-NR'_2$ ,  $-N^+R'_3A^-$ ,

$-N^+R'H_2A^-$ , and  $-NR'CH_2CH_2N^+R'H_2A^-$  wherein R' is selected from the group consisting of hydrogen, phenyl, benzyl, and

10 monovalent saturated hydrocarbon radicals composed of 1 to 20 carbon atoms and  $A^-$  is a halogen. Specific examples of monovalent saturated hydrocarbon radicals composed of 1 to 20 carbon atoms include methyl, ethyl, propyl, butyl, pentyl, hexyl, heptyl, octyl, nonyl, decyl, undecyl,

15 dodecyl, tetradecyl, hexadecyl, octadecyl, and eicosyl radicals. Specific examples of suitable halides,  $A^-$ , include chlorides, bromides, iodides, and fluorides. It is optimal, however, that R be selected from the group consisting of  $C_4H_8NHCH_2CH_2NH_2$ ,  $C_4H_8NHCH_2CH_2N^+R'H_2A^-$  and

20  $C_4H_8COOH$  wherein R' is benzyl.

The substituent on the siloxane, denoted by X, is selected from the group consisting of hydrogen, phenyl, hydroxyl and saturated hydrocarbon radicals composed of 1 to 8 carbon atoms. Specific examples of suitable

25 saturated hydrocarbon radicals include methyl, ethyl, propyl, butyl, pentyl, hexyl, heptyl and octyl. It is preferred, however, that X be a methyl radical.

It is further preferred that  $a$  have a value of 0,  $b$  have a value of 1, and  $n+m$  have a value of 50 to 150

30 with  $n$  having a value of 49 to 149 and  $m$  having a value of 1 to 10.

The composition also contains (B) a surfactant, (C) an additive that provides freeze-thaw stability, and (D) water.

5        Though the type of surfactant employed is not critical for the purpose of this invention, typical surfactants include cationic, non-ionic and anionic surfactants and mixtures thereof. The purpose of the surfactants is to maintain a stable dispersion of the silicone. Anionic surfactants include carboxylates, sulfonates, sulfates, 10 and phosphate esters. Cationic surfactants include amines and quaternary salts. Non-ionic surfactants include polyoxyethylene derivatives of fatty alcohols, carboxylic esters, and carboxylic amides.

15        It is preferred that the surfactant be non-ionic. Specific examples of suitable non-ionic surfactants include polyoxyethylene octyl phenol containing 10 polyoxyethylene units, an alkyl ether of polyoxyethylene, an alkyl aryl ether of polyoxyethylene, trimethylnonyl polyethylene glycol ether, octyl phenoxy 20 polyethoxy ethanol, and mixtures thereof. It is preferred that the surfactant be a mixture of approximately equal parts of trimethylnonyl polyethylene glycol ether and octyl phenoxy polyethoxy ethanol.

25        It is preferred that Component (C), the additive that provides freeze-thaw stability, be selected from the group consisting of ethylene glycol and glycerol. It is further preferred that it be ethylene glycol.

      It is preferred that the composition to condition hair consist essentially of

0.1 to 61	percent by weight	Component (A),
0.02 to 11.6	" " "	(B),
0.003 to 2	" " "	(C),
and 0.16 to 99.88	" " "	(D).

5 If desired, the composition may further contain (E) a thickener, and (F) an additive that reduces static electricity build-up and fly-away.

It is preferred that the thickener be selected from the group consisting of methylcellulose and a  
10 neutralized polymer of acrylic acid crosslinked with a polyfunctional agent.

It is preferred that (F) the additive that reduces static electricity build-up and fly-away be a quaternary amine. It is further preferred that the  
15 quaternary amine additive have the general formula  $A^-N^+R'_4$  where  $R'$  is selected from the group consisting of hydrogen, phenyl, benzyl, and monovalent saturated hydrocarbon radicals composed of 1 to 20 carbon atoms, and  $A^-$  is a halogen. Specific examples of suitable monovalent  
20 saturated hydrocarbon radicals composed of 1 to 20 carbon atoms include methyl, ethyl, propyl, butyl, pentyl, hexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl, tetradecyl, hexadecyl, octadecyl and eicosyl. Specific examples of suitable halides,  $A^-$ , include chlorides, bromides,  
25 iodides, and fluorides. It is optimal that the quaternary amine additive be  $C_{18}H_{37}N^+(CH_3)_3Cl^-$ . The quaternary amine additive also functions, to a certain extent, as a thickener.

It is optimal that the composition contain  
30 components (A), (B), (C), (D), (E) and (F). The ease of application to the hair is improved by the presence of all six (6) ingredients due to the viscosity increase. For convenience purposes only, it is preferred that the



composition to condition hair have a viscosity range of 1000 centipoises to 100,000 centipoises at 25°C and a pH value range of 7 to 9.

It is optimal that the composition consist essentially of

5	0.1 to 15	percent by weight Component (A),
	0.012 to 2.85	" " " " (B),
	0.003 to .43	" " " " (C),
	73.72 to 99.685	" " " " (D),
10	0.1 to 3	" " " " (E),
	and 0.1 to 5	" " " " (F).

The components of the present invention are well known to those skilled in the art so the preparation of the individual components will not be repeated here. It is preferred that the composition of the present invention be used as a hair conditioner treatment after shampooing. Any suitable method of application may be employed, for example, immersion or spraying.

In addition to the essential ingredients, the composition of this invention may include minor quantities of optional materials which are added for specific purposes. Such other ingredients include, but are not limited to, medicaments, solvents, perfumes, sequestering agents, opacifiers, and antimicrobial preservatives, of which silicone is one, all of which are commonly used and are well known to be capable of use in hair care formulations.


The term "hair" as used in the present invention includes treated and untreated human hair, animal hair, and any type of fiber that needs gloss, ease of combing, and reduced fly-away. Treated hair includes hair that is chemically changed and/or damaged by permanents and dyes.

In order that those skilled in the art may better understand how the present invention can be practised, the following examples are given by way of illustration and not by way of limitation. All parts and percents referred to herein are by weight, and all viscosities are measured at 25°C unless otherwise noted. The formulations were tested at water dilutions of 30%, but under normal use conditions, the formulations would be used as is, with no water dilution.

10 Example 1

The following formulations were tested as conditioners on dark European hair swatches and compared to unconditioned dark European hair swatches on the basis of feel and ease of wet and dry combing. The combing rating scale ranged from 1 to 5 with 1 being easy to comb, very little resistance, and 5 being impossible to get the comb through the hair.

Formulation 1 was prepared by heating 90 grams of water to approximately 90°C and then dispersing 2.0 grams of methylcellulose and 0.5 gram of sodium chloride in the water using a medium-shear mixing device. Stirring was continued until the dispersion was at 65°C. Then there was added 1.5 grams of stearylalkonium chloride and 1.0 gram of cetyl alcohol, and it was made sure both these ingredients were thoroughly dispersed. The mixture was allowed to cool to 40°C with stirring in such a way that no foam was generated. Finally, there was added 5.0 grams of a material prepared as follows: Mix 3.60 grams octyl phenoxy polyethoxy ethanol, specifically Triton X-405 manufactured by Rohm and Haas Company, and 12 grams of water. Slowly, add 35.00 grams of

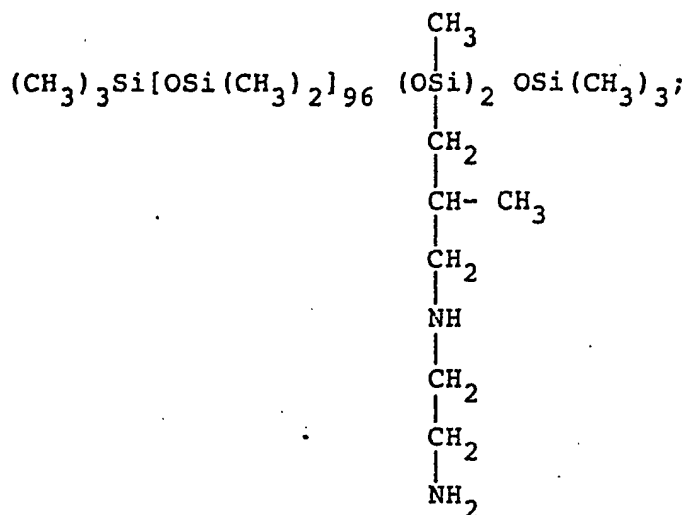


(This polymer normally contains 5% dimethylsiloxane  
 cyclics as manufactured) with mixing. After stirring for  
 10 minutes, 3.06 grams of Tergitol TMN-6, a trimethylnonyl  
 polyethylene glycol ether manufactured by Union Carbide  
 5 Company, are added slowly. The mixture is then stirred for  
 3 hours using a high shear mixer (stirring for 1 hour  
 and then passing through a colloid mill with a 0.015 inch  
 gap is comparable). One gram of ethylene glycol and 45.34  
 grams of water are then added and the mixture is stirred  
 10 until uniform.

Formulation 1 was then diluted to 30 percent in  
 water for testing purposes.

Formulation 2 was prepared by dispersing and  
 dissolving 0.24 gram Carbopol, a polymer of acrylic acid  
 15 crosslinked with a polyfunctional agent manufactured by  
 B.F. Goodrich Company, into 47.315 grams water and 0.13  
 gram sodium hydroxide into 47.315 grams water. Then the  
 sodium hydroxide solution was added to the Carbopol  
 solution while slowly stirring. Gelation is common as  
 20 the sodium hydroxide solution is added. The pH of the

mixture should be 7 or higher. If it is not, adjust upwards with a small amount of sodium hydroxide. Next there was added 5.00 grams of a material prepared as follows: Mix 3.60 grams octyl phenoxy polyethoxy ethanol, specifically Triton X-405 manufactured by Rohm and Haas Company, and 12 grams of water. Slowly, add 35.00 grams of

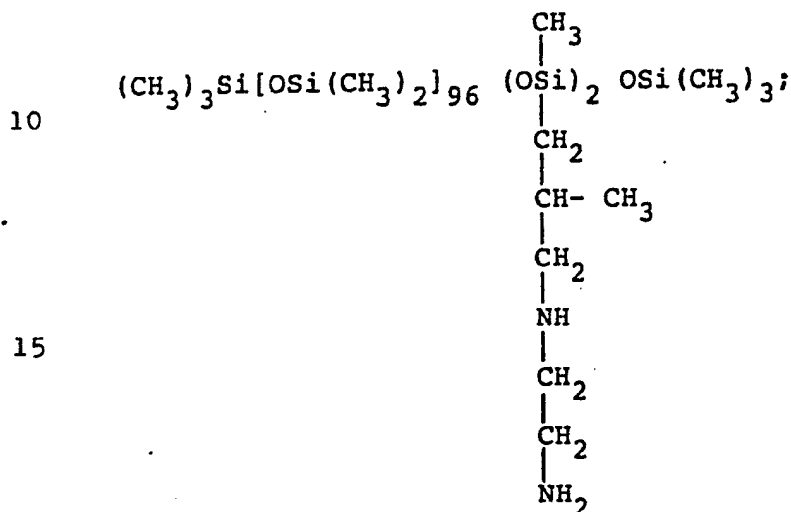

(this polymer normally contains 5% dimethylsiloxane cyclics as manufactured) with mixing. After stirring for 10 minutes, 3.06 grams of Tergitol TMN-6, a trimethylnonyl polyethylene glycol ether manufactured by Union Carbide Company, are added slowly. The mixture is then stirred for 3 hours using a high shear mixer (stirring for 1 hour and then passing through a colloid mill with a 0.015 inch gap is comprable). One gram of ethylene glycol and 45.34 grams of water are then added and the mixture is stirred until uniform.

Formulation 2 was then diluted to 30 percent in water for testing purposes.

The formulations were applied to wet hair, after it was shampooed, in an amount sufficient to thoroughly coat the hair. The conditioners were allowed to stay on the hair for 2 minutes and then were rinsed off with warm water. After evaluating the wet combing and wet feel, the hair was blown dry and then evaluated for dry combing.

The results are as follows:

		Formulation	
<u>Test</u>		<u>1</u>	<u>2</u>
10	Wet Comb Rating	3.5	1.2
	Wet Feel	Rough	Smooth
	Dry Comb Rating	2.0	1.0

## Claims:

1. A composition consisting essentially of
  - (A) a siloxane having the general formula
 
$$R_a X_{3-a} Si(OSiX_2)_n (OSiX_b R_{2-b})_m OSiX_{3-a} R_a$$
 wherein R is a functional group that
    - provides attachment to the hair;
    - X is selected from the group consisting of hydrogen, phenyl, hydroxyl, and saturated hydrocarbon radicals composed of 1 to 8 carbon atoms;
    - a has a value of 0 to 3;
    - b has a value of 0 to 1; and
    - n+m has a value of 1 to 1999 with n having a value of 0 to 2000 and m having a value of 1 to 2000;
  - (B) a surfactant;
  - (C) an additive that provides freeze-thaw stability; and
  - (D) water.
2. The composition as defined in claim 1 wherein the composition consists essentially of
 

0.1 to 61	percent by weight	Component (A),
0.02 to 11.6	" " "	(B),
0.003 to 2	" " "	(C),
and 0.16 to 99.88	" " "	(D).
3. The composition as defined in claim 1 or 2, wherein the composition contains (E) a thickener and (F) an additive that reduces static electricity and fly-away.

4. A method for conditioning hair which comprises applying to the hair the composition as defined in any of claims 1 to 3.

⑫ **EUROPEAN PATENT APPLICATION**

⑲ Application number: 83302016.7

⑤① Int. Cl.<sup>2</sup>: **A 61 K 7/11**  
**C 08 L 83/06, C 08 L 83/08**

⑳ Date of filing: 11.04.83

③① Priority: 20.05.82 US 380178

④③ Date of publication of application:  
30.11.83 Bulletin 83/48

⑧⑧ Date of deferred publication of search report: 01.08.84

⑧④ Designated Contracting States:  
DE FR GB

⑦① Applicant: **DOW CORNING CORPORATION**  
**P.O. Box 1767**  
**Midland Michigan 48640(US)**

⑦② Inventor: **Starch, Michael Stephen**  
**3945 E. Patrick**  
**Midland Michigan(US)**

⑦④ Representative: **Laredo, Jack Joseph et al,**  
**Elkington and Fife High Holborn House 52/54 High**  
**Holborn**  
**London, WC1V 6SH(GB)**

⑤④ **Compositions used to condition hair.**

⑤⑦ A composition consisting essentially of a siloxane having substituents that provide attachment to the hair, surfactants, additives that provide freeze-thaw stability, and water is disclosed. The composition may also contain thickeners, and additives that reduce static electricity build-up, and fly-away. A method of conditioning hair which comprises applying to the hair the composition as defined above is also disclosed.





European Patent  
Office

# EUROPEAN SEARCH REPORT

0095238

Application number

DOCUMENTS CONSIDERED TO BE RELEVANT			EP 83302016.7
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 7)
X	GB - A - 1 154 766 (DOW CORNING CORPORATION) * Examples 3-5; claims * --	1-3	A 61 K 7/11 C 08 L 83/06 C 08 L 83/08
Y	US - A - 4 185 087 (R. MORLINO) * Claim 10; column 6, line 61-68 * --	1-4	
Y	DE - A1 - 3 026 501 (BAYER AG) * Claim 6; page 5, line 21 - page 6, line 3 * --	1,2	
A	DE - B - 2 038 782 (DOW CORNING CORPORATION) * Claim 2; examples 3-5 * --	1,2	
A	GB - A - 1 215 328 (DOW CORNING CORPORATION) * Claims 1,2; examples * ----	1,2	
The present search report has been drawn up for all claims			
Place of search VIENNA		Date of completion of the search 26-04-1984	Examiner KALTENEGGER
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO Form 1500, 03.82

BAD ORIGINAL

⑫

**EUROPEAN PATENT APPLICATION**

⑲ Application number: 83302016.7

⑤① Int. Cl.<sup>3</sup>: **A 61 K 7/11**  
**C 08 L 83/06, C 08 L 83/08**

⑳ Date of filing: 11.04.83

③① Priority: 20.05.82 US 380178

④③ Date of publication of application:  
30.11.83 Bulletin 83/48

⑧⑧ Date of deferred publication of search report: 01.08.84

⑧④ Designated Contracting States:  
DE FR GB

⑦① Applicant: **DOW CORNING CORPORATION**  
**P.O. Box 1767**  
**Midland Michigan 48640(US)**

⑦② Inventor: **Starch, Michael Stephen**  
**3945 E. Patrick**  
**Midland Michigan(US)**

⑦④ Representative: **Laredo, Jack Joseph et al,**  
**Elkington and Fife High Holborn House 52/54 High**  
**Holborn**  
**London, WC1V 6SH(GB)**

⑤④ Compositions used to condition hair.

⑤⑦ A composition consisting essentially of a siloxane having substituents that provide attachment to the hair, surfactants, additives that provide freeze-thaw stability, and water is disclosed. The composition may also contain thickeners, and additives that reduce static electricity build-up, and fly-away. A method of conditioning hair which comprises applying to the hair the composition as defined above is also disclosed.



European Patent  
Office

# EUROPEAN SEARCH REPORT

0095238

Application number

DOCUMENTS CONSIDERED TO BE RELEVANT			EP 83302016.7
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl. 3)
X	GB - A - 1 154 766 (DOW CORNING CORPORATION) * Examples 3-5; claims * --	1-3	A 61 K 7/11 C 08 L 83/06 C 08 L 83/08
Y	US - A - 4 185 087 (R. MORLINO) * Claim 10; column 6, line 61-68 * --	1-4	
Y	DE - A1 - 3 026 501 (BAYER AG) * Claim 6; page 5, line 21 - page 6, line 3 * --	1,2	
A	DE - B - 2 038 782 (DOW CORNING CORPORATION) * Claim 2; examples 3-5 * --	1,2	
A	GB - A - 1 215 328 (DOW CORNING CORPORATION) * Claims 1,2; examples * ----	1,2	
The present search report has been drawn up for all claims			
Place of search VIENNA		Date of completion of the search 26-04-1984	Examiner KALTENEGGER
<b>CATEGORY OF CITED DOCUMENTS</b>			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO Form 1503 03/82

BAD ORIGINAL